SAE - WELD ON FLANGE SET

ASHH
HYDRAULIC FLANGES

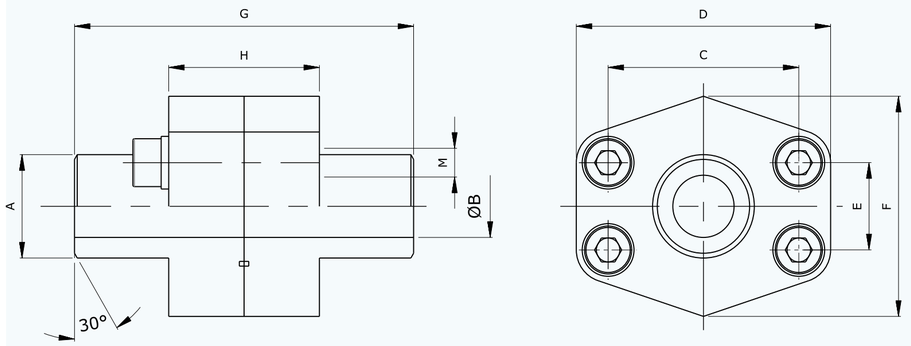

Click on RED & GREEN column to get dimensions / Click BLACK buttons to get different views.

Maximum recommended working pressure kg/cm2	S.A.E. nominal flange size, in	Type	Dimensions								SCREWS M
			A	B	C	D	E	F	G	H	metr.
					3000 P.S.I						
250	½"	DF3B/WC ½" x 21.3	21.5	13	38.10	54	17.48	43	72	32	M 8x30
250	½"	DF3B/WC ½" x 17.3	17.5	13	38.10	54	17.48	46	72	32	M 8x30
250	¾"	DF3B/WC ¾" x 28	28.0	19	47.63	65	22.23	50	72	36	M 10x35
250	1"	DF3B/WC 1" x 34	34.0	25	52.37	74	26.19	55	76	36	M 10x35
210	1¼"	DF3B/WC 1¼" x 42.2	42.8	32	58.72	81	30.18	68	82	42	M 10x40
160	1½"	DF3B/WC 1½" x 48.3	48.6	38	69.85	93	35.71	78	88	50	M 12x45
160	2"	DF3B/WC 2" x 60.3	61.0	51	77.77	102	42.88	90	90	50	M 12x45
140	2½"	DF3B/WC 2½" x 76.1	77.0	63	88.90	114	50.80	105	100	50	M 12x45
140	3"	DF3B/WC 3" x 91.1	92.0	73	106.38	134	61.93	124	100	54	M 16x50
					6.000P.S.I.						
320	½"	DF6B/WC ½" x 21.3	21.5	13	40.49	54	18.24	46	72	72	M 8x30
320	½"	DF6B/WC ½" x 17.3	17.5	13	40.49	54	18.24	46	72	72	M 8x30
320	¾"	DF6B/WC ¾" x 28	28.0	19	50.80	71	23.80	55	70	70	M 10x35
320	1"	DF6B/WC 1" x 34	34.0	25	57.15	79	27.76	68	82	82	M 12x45
250	1¼"	DF6B/WC 1¼" x 42.2	42.8	32	66.68	93	31.75	78	88	88	M 14x45
320	1¼"	DF6B/WC 1¼" x 42.2	42.8	29	66.68	93	31.75	78	88	88	M 14x45
210	1½"	DF6B/WC 1½" x 48.3	48.6	38	79.38	112	36.50	94	110	110	M 16x50
320	1½"	DF6B/WC 1½" x 48.3	48.6	34	79.38	112	36.50	94	110	110	M 16x50
210	2"	DF6B/WC 2" x 60.3	61.0	51	96.82	134	44.45	114	130	130	M 20x65

Designation for order	IS2062	1.4301	MATERIAL
- Flange only	DF3B/WC	DF3B/WCS	ST 52 - 3 | A 105 | AISI 304 | AISI 316
-Flg. incl. metric screws & o-ring	DF3B/WCM	DF3B/WCMS	

3D VIEW | VIEW 1 | VIEW 2 | SECTION | SLIDESHOW

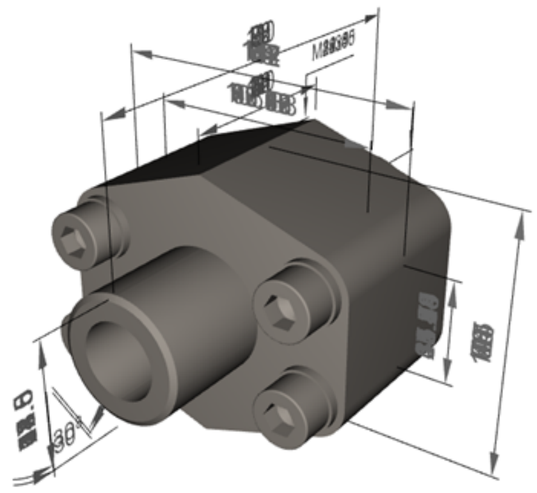

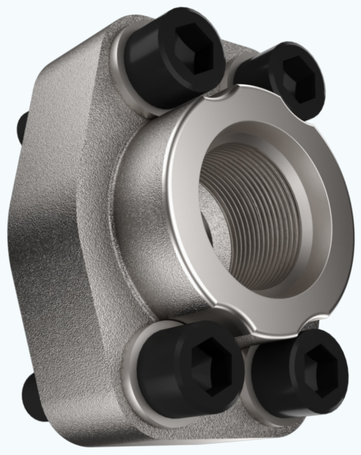

Our Products

- Hydraulic Power Pack
- PLC Control Power Pack
- Special Purpose Test Stand
- Pipe Spool
- Header Assembly
- Encloser
- CNC Component
- SAE Flanges
- Coupling (KTR MAKE)